

Cut like a Professional Attachments

DO IT YOURSELF

These metal-shears are tools with many professional refinements, because the home handyman deserves the same efficient working aids as the trained craftsman. He too, should profit from the experience gained.

It is a indispensable tool for any metalworker, who has to cut metal occasional, without any deforming to surface and need of no after-work due to the double cutting system.

Specific TYP I

- ideal for installations, air conditioning, ducting, aircraft manufacturing.
- a DO IT YOURSELF tool with many professional refinements
- assembling and removing attachment from electric, pneumatic or cordless drill is easy and simple
- for use with all European and foreign electric drills as: Bosch, Fein, AEG, Metabo, Hitachi, Makita, Skil with eurocollar 43 mm
- as the DRÄCO S1001N, only without a motor.


Specific TYP 1-SD5

- ideal for tinsmith and body coach workshops
- installation of car sun roofs
- support roller keeps the shear flat
- short curves possible
- assembling and removing attachment from drill is easy and simple
- for use with all European and foreign electric drills as: Bosch, Fein, AEG, Metabo, Hitachi, Makita, Skil with eurocollar 43 mm
- same as the DRÄCO SD5, without motor only

TYP II

- **specially for plastics** as the DRÄCO S1002N (see page 13), without motor only



TYP I-SD5

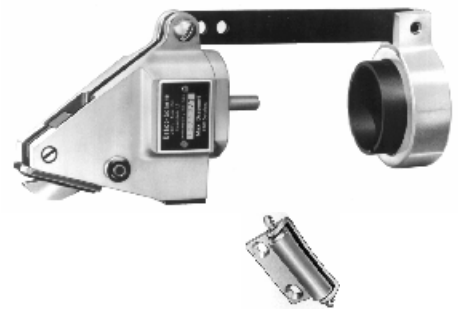

TYP I



TYP II

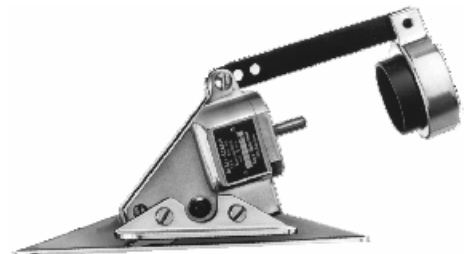

DRÄCO Attachments		type	TYP I-SD5	TYP I
max. cutting capacity		Art.no.	62500	62510
steel	400 N/mm ²	mm/ga.	1,0 / 19	1,3 / 18
stainl.steel	600 N/mm ²	mm/ga.	0,7 / 21	1,0 / 19
stainl.steel	800 N/mm ²	mm/ga.	0,4 / 26	0,7 / 22
aluminium	250 N/mm ²	mm/ga.	1,5 / 16	2,0 / 14
lead		mm/ga.	3,0 / 10	3,0 / 10
tightest radius		mm/ "	50 / 2	100 / 4
strokes optimal		min ⁻¹	2000-3800	
strokes minimal		min ⁻¹	1200	1200
weight	without drill	kg	0,6	0,6

TYP I-SD5		TYP I	
knife	01011	knife	01001
set of jaws	BG13574/1	set of jaws	BG10600
knife-pin set	BG12555	knife-pin set	BG12555
For spares TYP II see page 13			
optional accessories			
adjustable guide S/01 up to 100 mm			10059
adjustable guide S/01 up to 250 mm			10060
adjustable guide S/01 up to 500 mm			10061
support roller			BG10076

all units are ready to use

BG=Set