

Cut like a Professional DO IT YOURSELF

These metal-shears are tools with many professional refinements, because the home handyman deserves the same efficient working aids as the trained craftsman. He too, should profit from the experience gained.

It is an indispensable tool for any worker who has to cut metal or plastic without deforming.

Specifics TYP I

- ideal for installations, air conditioning, ducting, aircraft manufacturing
- a DO IT YOURSELF tool with many professional refinements
- assembling and removing attachment from electric, pneumatic or cordless drill is easy and simple
- for use with all European and foreign electric drills as: Bosch, Fein, AEG, Metabo, Hitachi, Makita, Skil with euro collar 43 mm
- same as the DRÄCO S1001N-1, without motor


Specifics TYP 1-SD5

- ideal for tinsmith and body coach workshops
- installation of car sun roofs
- support roller keeps the shear flat
- short curves possible
- assembling and removing attachment from drill is easy and simple
- for use with all European and foreign electric drills as: Bosch, Fein, AEG, Metabo, Hitachi, Makita, Skil with euro collar 43 mm
- same as the DRÄCO SD5-1, without motor only

Specifics TYP II

- **specialty for plastics** as the DRÄCO S1002N-1 (see page 16), without motor

TYP I-SD5

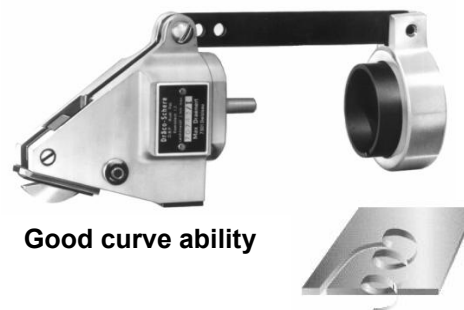

Good curve ability

TYP I



TYP II



cut-outs from drilled starting holes 10-12mm



cutting of shaped parts

DRÄCO Attachments	type	TYP I-SD5	TYP I
max. cutting capacity	<i>Art.no.</i>	62500	62510
steel 400 N/mm ²	mm/ga.	1,0 / 19	1,3 / 18
stainl.steel 600 N/mm ²	mm/ga.	0,7 / 21	1,0 / 19
stainl.steel 800 N/mm ²	mm/ga.	0,4 / 26	0,7 / 22
non ferro 250 N/mm ²	mm/ga.	1,5 / 16	2,0 / 14
lead	mm/ga.	3,0 / 10	3,0 / 10
tightest radius	mm/ "	50 / 2	100 / 4
strokes optimal	min ⁻¹	2000-3800	2000-3800
strokes minimal	min ⁻¹	1200	1200
weight without drill	kg	0,6	0,6

all units are ready to use

TYP I-SD5	TYP I
knife 01011	knife 01001
set of jaws BG13574/1	set of jaws BG10600
knife-pin set BG12555	knife-pin set BG12555
For spares TYP II	
see page 16	
optional accessories	
adjustable guide S/01 up to 100 mm	10059
adjustable guide S/01 up to 250 mm	10060
adjustable guide S/01 up to 500 mm	10061
support roller	BG10076

BG=Set